

5	4
Clamping Diameter (D)	Center to Center (L)
$\frac{aa}{16}$	$\frac{aa + bb + 4}{32}$
± .031	± .031

aa from 06 to 14				
bb	Hole Diameter (H)	Hole Center to End (E)	Width (W)	Gap (F)
07	.203	.218	.500	.031
09	.281	.312		
11	.343	.375		
13	.406	.437		
	± .005	± .015	± .010	± .031



aa from 03 to 05				
bb	Hole Diameter (H)	Hole Center to End (E)	Width (W)	Gap (F)
09	.281	.312	.500	.062
11	.343	.375	.625	
13	.406	.437	.750	
15	.468	.500	.875	
17	.531	.562	1.000	
	± .005	± .015	± .010	± .031

Material Thickness (T)		
aa from 03 to 07	aa from 08 to 12	aa from 12 to 16
.032	.048	.060
± .002		

Exceptions to the rule for T are:
CDV-0717 = .048

Material and Finish Codes
Z1 - CS, HD Galvanized, Chem Treated G90
Z2 - CS, .0002 min Zinc, Clear

Cushion is Black Vinyl, 1/32" Thick

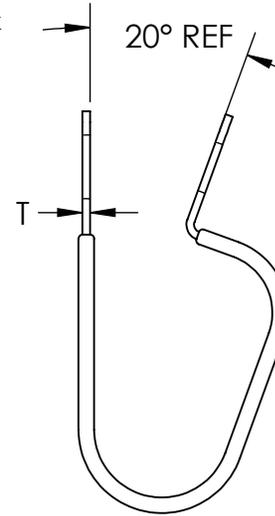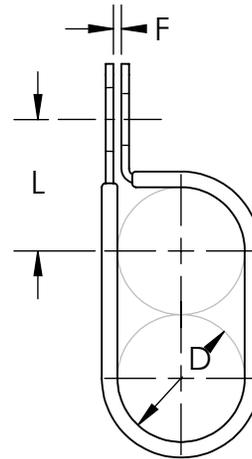

EXAMPLE OF PART CALLOUT

CDV - 16 13 Z1


This part number indicates the clamp will have dimensions:
Clamping Diameter (D) = 1.000
Hole Diameter (H) = .406
Center to Center (L) = 1.031
Width (W) = .750
Hole Center to End (E) = .437
Gap (F) = .062
Material Thickness (G) = .060
Slot Length (S) = .500

Made from CS, Hot Dipped Galvanized, Chem Treated G90


Coated in Black Vinyl, 1/32" thick

As Supplied (Open Position)

Note: CDV clamps have a circular hole with diameter H on the top side and a slotted hole with length S, and width H, on the bottom side.

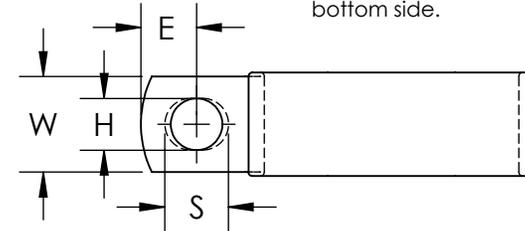

EXPLANATION OF PART CALLOUT

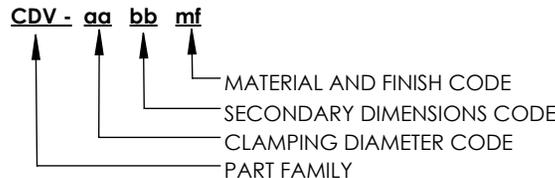

THE ORIGINAL CLIP & CLAMP CO.

1221 SOUTH PARK STREET
PORT WASHINGTON, WI 53074
(262) 377-5030

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KICKHAEFER MANUFACTURING COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KICKHAEFER MANUFACTURING COMPANY IS PROHIBITED.

PART SERIES MASTER PRINT

CDV

COATED, DOUBLE TUBE CLAMPS

DRAWN CHECKED

BC KW

8/22/17 9/11/18

NOT TO SCALE